


GFMJ SERIES VRLA BATTERY

The GFMJ series is designed for frequent cyclic charge and discharge applications under extreme environments. By combining the newly developed Nano Gel electrolyte with high density paste, the GFMJ series offers high recharge efficiency at very low charge current. The acid stratification is highly reduced by adding Nano Gel.

This series is suit for energy storage for renewable energies such as PV, wind turbine power systems and CATV.

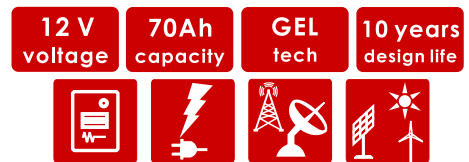


Complied standards

- IEC 60896-21/22
- GB/T 19638
- IEC 61427
- JIS C8704
- BS6290 part 4
- UL 1989

TECHNICAL SPECIFICATIONS

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (20°C)	10 Years
Nominal Capacity (25°C)	70 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L265mm x W168mm x H218mm
Approx. Weight	22.8 kg (50.3 lbs)
Terminal Type	Female Copper Insert M6 (torque: 6~8N.m)
Internal Resistance	Approx. 0.006 Ohm (fully charged @ 25°C)
Max. Charge Current	17.5A
Max. Discharge Current (5S)	700 A
Short Circuit Current	2000 A
Self Discharge	Approx. 2.5% per month @ 20°C
Ambient Temperature	Discharge: -25~65°C Charge: -25~60°C Storage: -25~45°C
Float Charge Voltage	13.5V @25°C (-3mV/ cell/ °C)
Equalize and cycle Use Charge Voltage	14.1-14.4V @25°C
Container Material	ABS (UL94-V0 optional)

BATTERY DIMENSIONS

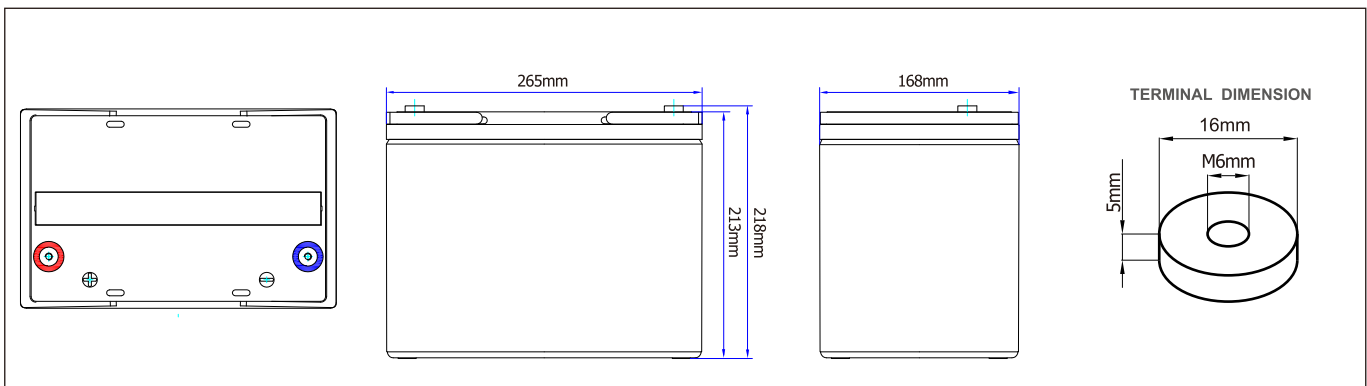

BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	72.5	45.0	26.6	19.4	15.4	12.9	8.77	7.24	3.82
1.75V	70.0	44.1	26.2	19.1	15.3	12.7	8.65	7.14	3.75
1.80V	66.9	42.6	25.6	18.7	14.9	12.4	8.44	7.00	3.67
1.85V	63.1	40.8	24.6	18.1	14.5	12.1	8.26	6.82	3.59

Constant Power Discharge Characteristics: W/cell (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	136	85.0	50.7	37.1	29.7	24.9	17.1	14.2	7.52
1.75V	132	83.9	50.3	36.8	29.6	24.8	17.0	14.1	7.42
1.80V	127	81.9	49.6	36.4	29.2	24.4	16.7	13.9	7.34
1.85V	122	79.1	48.2	35.5	28.6	24.0	16.5	13.6	7.21

PARAMETERS FOR SOLAR & WIND APPLICATIONS


Long time discharge capacity for Solar & Wind applications

Capacity	C ₂₄ (Ah)	C ₄₈ (Ah)	C ₇₂ (Ah)	C ₁₀₀ (Ah)	C ₁₂₀ (Ah)
Solar12-70	74.9	79.1	81.2	84.7	87.5
Final Voltage	1.85V				

Solar & Wind applications parameters settings

Over voltage disconnect:	2.45±0.01V/cell @ 25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 25°C
Array reconnection voltage:	2.25±0.005V/cell @ 25°C
Float voltage setting:	2.27±0.005V/cell @ 25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 25°C
Low voltage disconnect:	1.90±0.005V/cell @ 25°C
Load reconnect voltage:	2.09±0.01V/cell @ 25°C
Temp. compensate coefficient:	-3~-5mV/cell/°C

CHARACTERISTICS

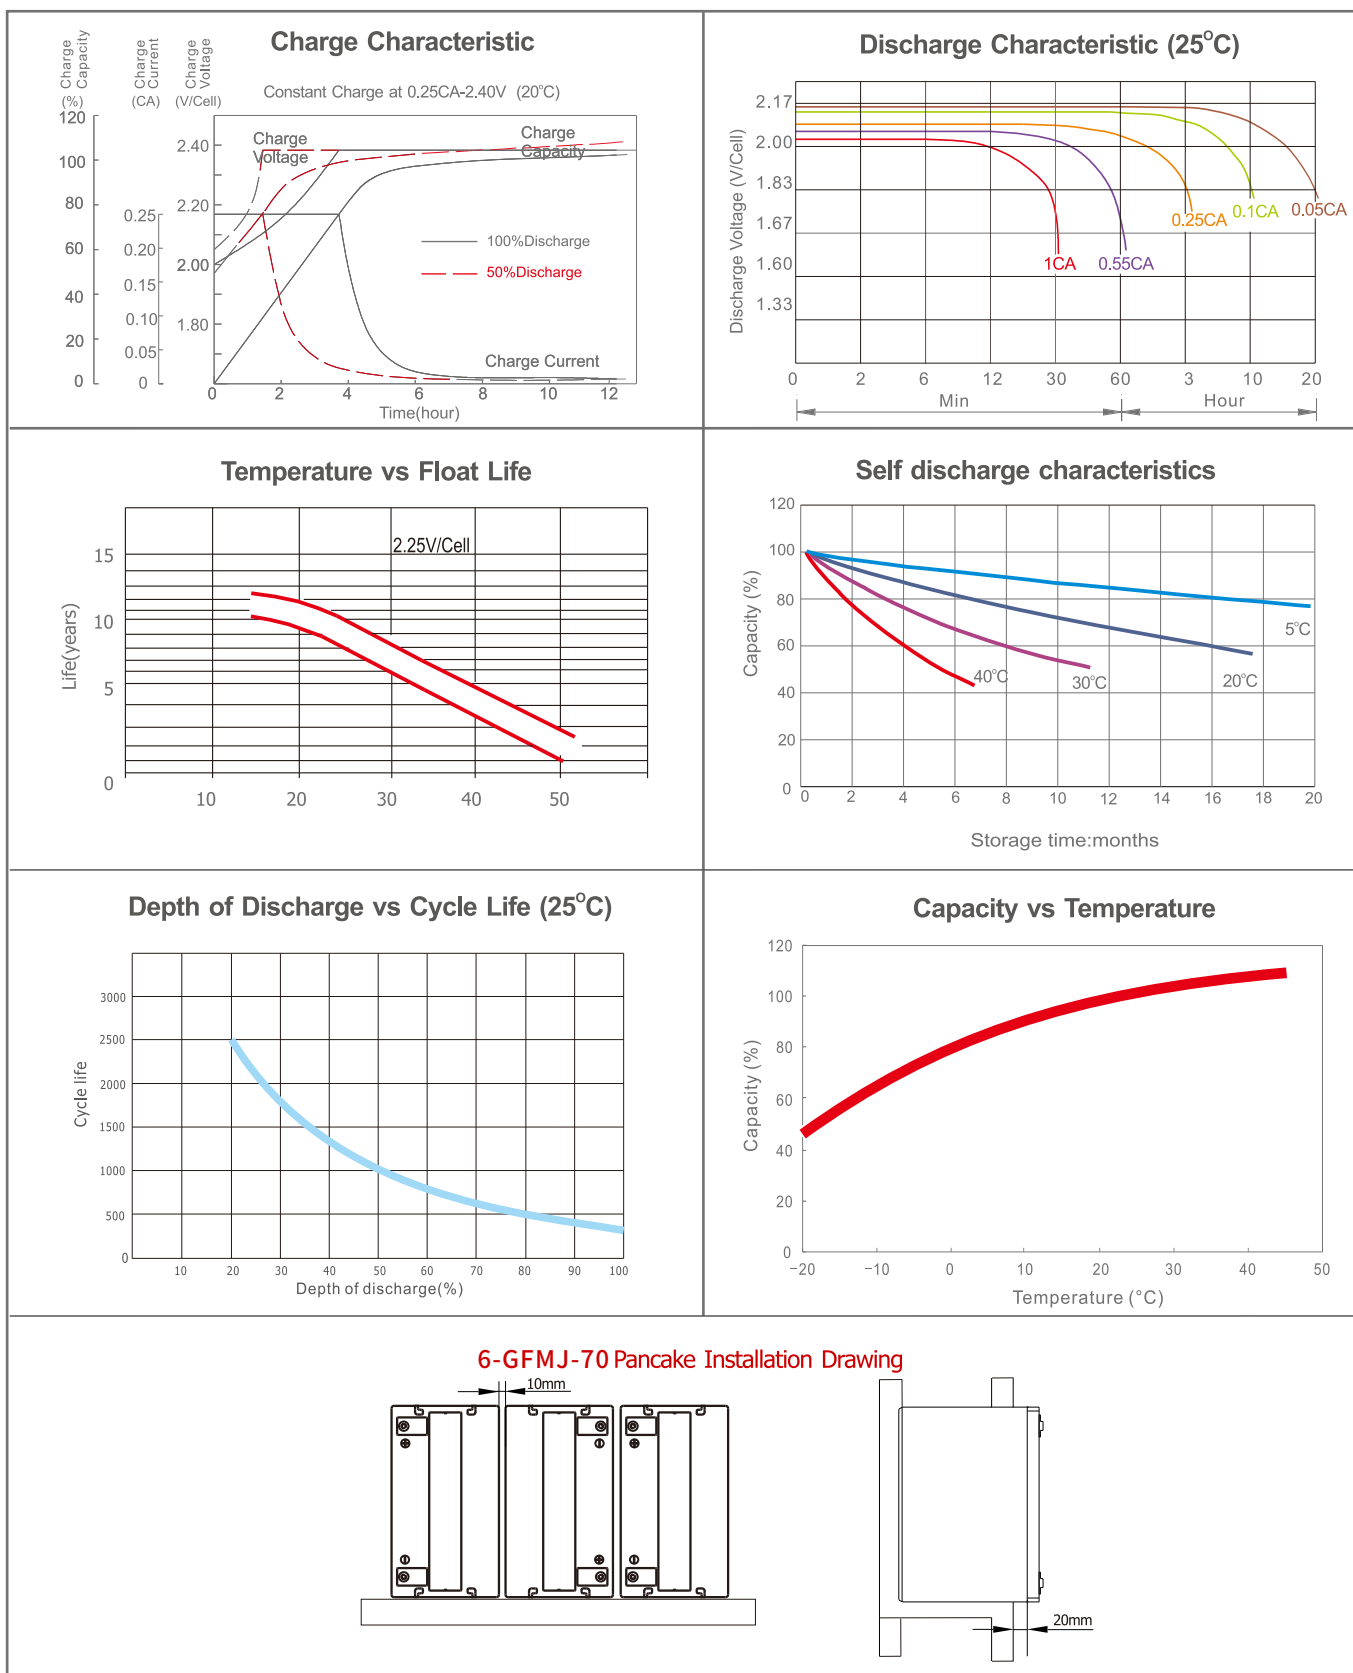

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

HEADQUARTERS AND SUBSIDIARIES

Zhejiang Xupai Power CO.,Ltd
Jiangxi Yatai Electric Co., Ltd.

Xupai Power Co., Ltd.
Tian Wei New Energy Technologies Ltd.,

Jiangxi Hetian New Energy Technology Co., Ltd