

CNFJ series sealed lead acid battery

The CNFJ series is suitable for medium and low depth loop scene applications. The product uses a nanogel electrolyte with a dedicated deep cycle formulation. CNFJ series has high charging efficiency at extremely low charging current, and has excellent resistance to overcharge and overdischarge. This range of products is suitable for photovoltaics, wind power systems and similar cyclic applications.

12 V
voltage

38Ah
capacity

circular
technology

6 years
design life



ISO9001



ISO14001



ISO18001:2007




Complied standards

- IEC61427
- GB/T 22473
- UL1989

TECHNICAL SPECIFICATIONS

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (25°C)	6 Years
Nominal Capacity (25°C)	38Ah@C ₁₀ Capacitance, 3.8A discharging to be 10.8V
Dimension (mm)	L197mm x W165mm x H176mm
Approx. Weight	12.5 kg
Terminal Type	Female Copper Insert M6 (torque:6~8N.m)
Internal Resistance	Approx.6mΩ (fully charged @ 25°C)
Max. Charge Current	16A
Max. Discharge Current (5S)	550 A
Self Discharge	Approx.4 % per month @ 20 °C
Ambient Temperature	Discharge: -25~65 °C Charge: -25~60 °C Storage: -25~45 °C
Float Charge Voltage	14.4 ~ 14.7V @25°C
Equalize and cycle Use Charge Voltage	13.5 ~ 13.8V @25°C
Container Material	ABS (UL94-V0 optional)

BATTERY DIMENSIONS

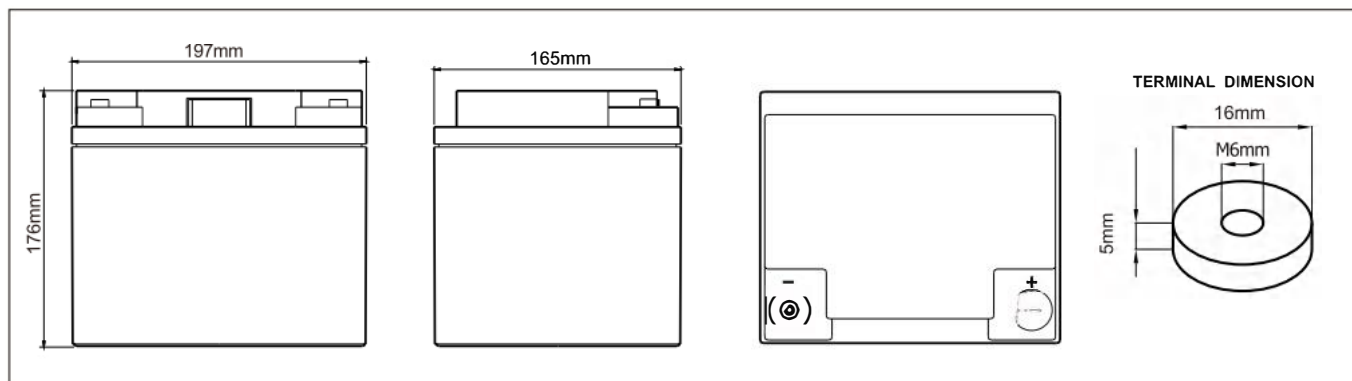

BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	39.3	24.4	14.4	10.5	8.39	7.00	4.76	3.93	2.07
1.75V	38.0	23.9	14.4	10.4	8.29	6.91	4.69	3.88	2.03
1.80V	36.3	23.2	13.9	10.2	8.09	6.75	4.59	3.80	2.00
1.85V	34.3	22.1	13.4	9.79	7.87	6.58	4.48	3.71	1.95

Constant Power Discharge Characteristics: W/cell (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	73.7	46.2	27.6	20.1	16.2	13.5	9.27	7.69	4.09
1.75V	71.7	45.5	27.3	20.0	16.1	13.5	9.22	7.64	4.03
1.80V	69.3	44.5	27.0	19.8	15.9	13.2	9.07	7.55	3.98
1.85V	66.0	42.9	26.1	19.3	15.5	13.0	8.93	7.40	3.91


Long-term discharge capacity parameters

Capacity	C ₂₄ (Ah)	C ₂₀ (Ah)	C ₇₂ (Ah)	C ₁₀₀ (Ah)	C ₁₂₀ (Ah)
6-CNFJ-38	40.6	42.9	44.0	45.9	47.5
Final Voltage	1.85V				

Solar & Wind applications parameters settings

Over voltage disconnect:	2.45±0.01V/cell @ 25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 25°C
Array reconnection voltage:	2.25±0.005V/cell @ 25°C
Float voltage setting:	2.27±0.005V/cell @ 25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 25°C
Low voltage disconnect:	1.90±0.005V/cell @ 25°C
Load reconnect voltage:	2.09±0.01V/cell @ 25°C
Temp. compensate coefficient:	-3~-5mV/cell/°C

CHARACTERISTICS

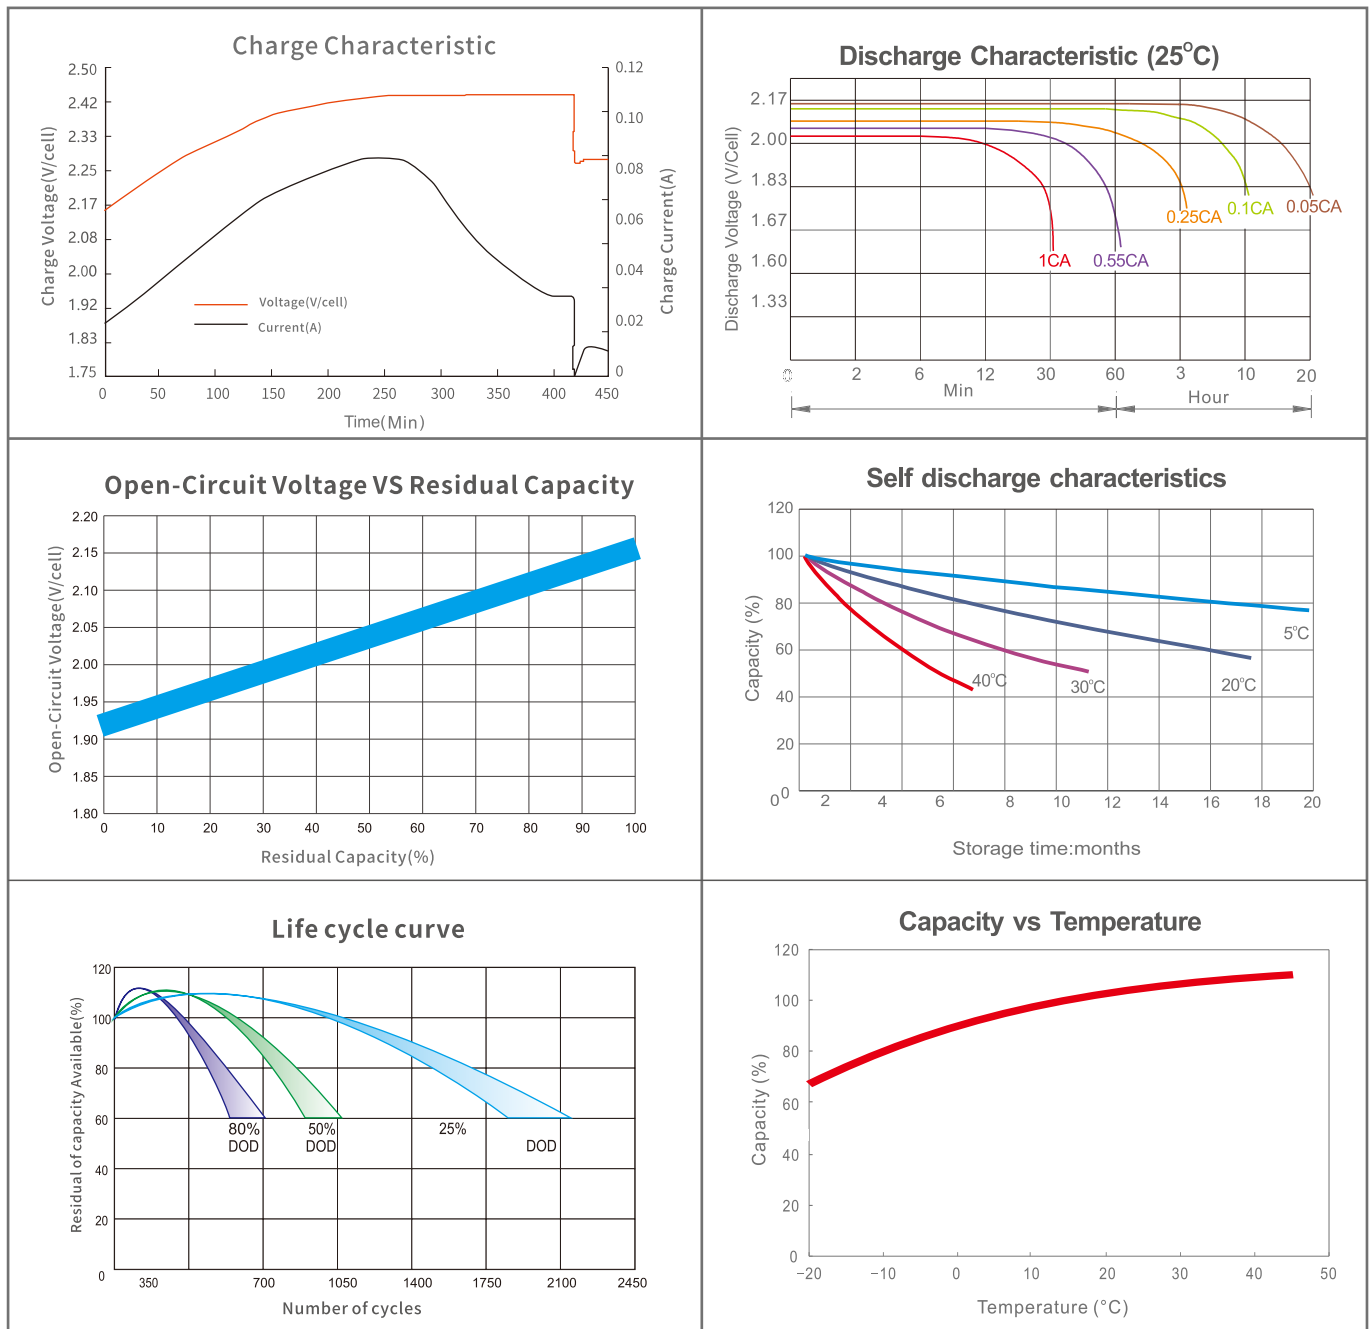

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I < 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

HEADQUARTERS AND SUBSIDIARIES

Zhejiang Xupai Power CO.,Ltd

Xupai Power Co., Ltd.

Jiangxi Hetian New Energy Technology Co., Ltd

Jiangxi Yatai Electric Co., Ltd.

Tian Wei New Energy Technologies Ltd.

