

CNFJ series sealed lead acid battery

The CNFJ series is suitable for medium and low depth loop scene applications. The product uses a nanogel electrolyte with a dedicated deep cycle formulation. CNFJ series has high charging efficiency at extremely low charging current, and has excellent resistance to overcharge and overdischarge. This range of products is suitable for photovoltaics, wind power systems and similar cyclic applications.

12 V voltage	65 Ah capacity	circular technology	6 years design life
-----------------	-------------------	------------------------	------------------------



TECHNICAL SPECIFICATIONS


Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (25°C)	6 Years
Nominal Capacity (25°C)	65Ah@C ₁₀ Capacitance, 6.5A discharging to be 10.8V
Dimension (mm)	L330mmxW171mmxH175mm
Approx. Weight	21.0 kg
Terminal Type	Female Copper Insert M6 (torque:6~8N.m)
Internal Resistance	Approx.6mΩ (fully charged @ 25°C)
Max. Charge Current	16A
Max. Discharge Current (5S)	550 A
Self Discharge	Approx.4 % per month @25°C
Ambient Temperature	Discharge: -25~65 °C Charge: -25~60° C Storage: -25~45° C
Float Charge Voltage	14.4 ~ 14.7V @25°C
Equalize and cycle Use Charge Voltage	13.5 ~ 13.8V @25°C
Container Material	ABS (UL94-V0 optional)



Complied standards

- IEC61427
- GB/T 22473
- UL1989

BATTERY DIMENSIONS

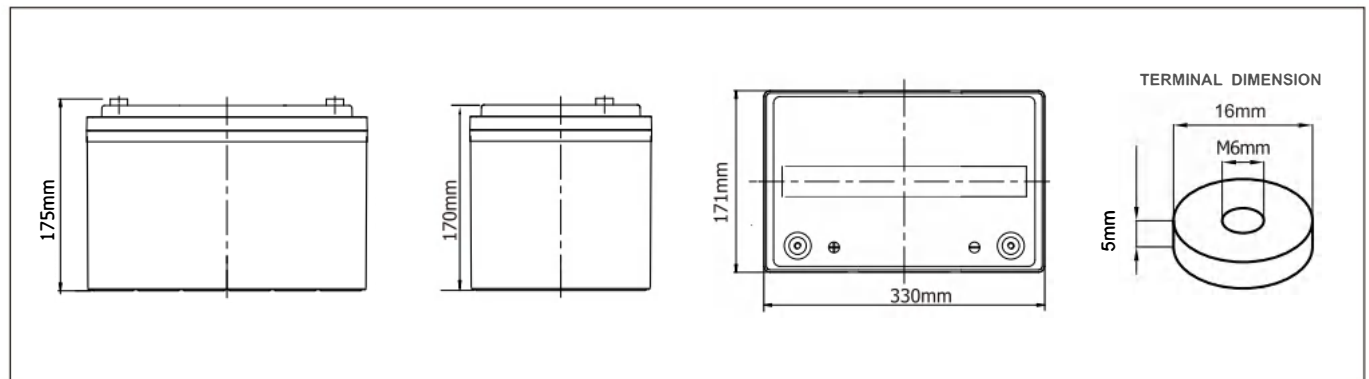

BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	67.3	41.8	24.7	18.0	14.3	12.0	8.14	6.72	3.54
1.75V	65.0	40.9	24.3	17.7	14.2	11.8	8.03	6.63	3.48
1.80V	62.1	39.6	23.8	17.4	13.9	11.5	7.84	6.50	3.41
1.85V	58.6	37.9	22.9	16.8	13.5	11.3	7.67	6.33	3.33

Constant Power Discharge Characteristics: W/cell (25°C)									
F.V/Time	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.70V	126	78.9	47.1	34.4	27.6	23.1	15.9	13.1	6.99
1.75V	123	77.9	46.7	34.2	27.5	23.0	15.8	13.0	6.89
1.80V	118	76.0	46.1	33.8	27.1	22.6	15.5	12.9	6.81
1.85V	113	73.5	44.7	33.0	26.5	22.3	15.3	12.7	6.70


Long-term discharge capacity parameters

Capacity	C ₂₄ (Ah)	C ₄₈ (Ah)	C ₇₂ (Ah)	C ₉₆ (Ah)	C ₁₂₀ (Ah)
6-CNFJ-65	69.6	73.5	75.4	78.7	81.3
Final Voltage	1.85V				

Solar & Wind applications parameters settings

Over voltage disconnect:	2.45±0.01V/cell @ 25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 25°C
Array reconnection voltage:	2.25±0.005V/cell @ 25°C
Float voltage setting:	2.27±0.005V/cell @ 25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 25°C
Low voltage disconnect:	1.90±0.005V/cell @ 25°C
Load reconnect voltage:	2.09±0.01V/cell @ 25°C
Temp. compensate coefficient:	-3~-5mV/cell/°C

CHARACTERISTICS

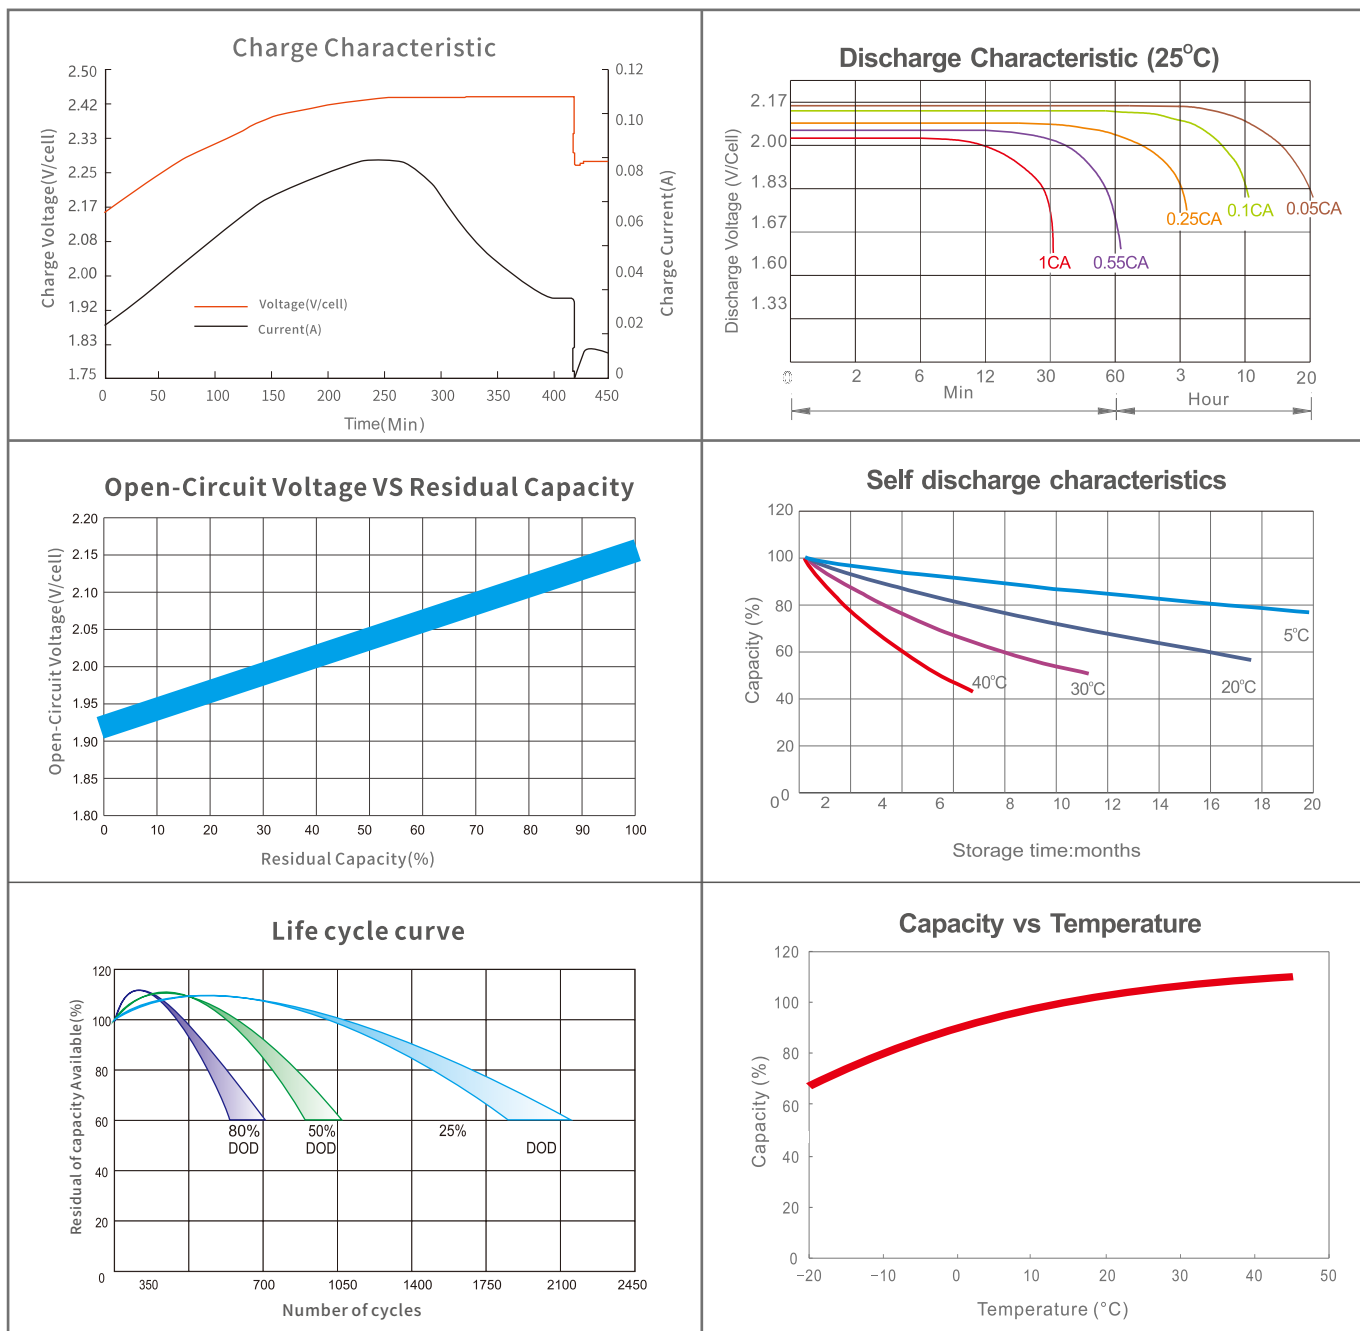

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I < 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

HEADQUARTERS AND SUBSIDIARIES

Zhejiang Xupai Power CO.,Ltd

Xupai Power Co., Ltd.

Jiangxi Hetian New Energy Technology Co., Ltd

Jiangxi Yatai Electric Co., Ltd.

Tian Wei New Energy Technologies Ltd.

